# Weaver® Scope

# Weaver® Steel·Lite II™

A new dimension in American craftsmanship.

# K Models

Weaver K Models, pacesetters for 30 years, continue to set new high standards in scope design and performance with the introduction of Steel-Lite II.

Unique, one-piece steel tube. The sharp, clean-cut shape is machine-tooled and hand-polished to a new and deeper SL•II finish. It's a beautiful match to the finest rifles, and highest quality steel provides the best possible protection for the superior optics.

The K Models feature Weaver's Micro-Trac Adjustment System for super-accurate windage and elevation settings. They're vacuumized, filled with dry nitrogen gas, and super sealed. They're the most dependable, most fogproof scopes we've ever designed.

Models K10F and K12F feature compact Weaver Range Focus for precision in long-range shooting.

All five reticle styles are available in most K Models (post and crosshair not offered in K8, K10F, K12F; Range-Finder not offered in K1.5, K2.5, K3).

## New Weaver® Steel-Lite II™ Models

**Steel-Lite II is a second generation of scope, featuring the magnum strength of high-grade steel and a substantial reduction in weight for ease of handling. Steel-Lite II is now competitive in weight with the lighter aluminum scopes, but way ahead when it comes to durability. It's way ahead in style, too. A new, deeper, more highly-polished SL•II finish is an impressive looking change that makes Steel-Lite II an all-around winner in performance and style.**

| Model | K1.5 | | K2.5 | | K3 | | K4 | | K6 | | K8 | | K10F | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Actual Magnification*** | 1.5 | 1.5 | 2.6 | 2.6 | 3.2 | 3.2 | 4.1 | 4.1 | 5.9 | 5.9 | 7.7 | 7.7 | 10 | 10 |
| **Field of View*** at 100 yds (ft) at 100 m (m) | 55 | 18.3 | 38 | 12.7 | 34 | 11.3 | 27 | 9 | 19 | 6.3 | 15 | 5 | 12 | 4 |
| **Eye Distance*** (inches) (mm) | 5¼ | 133.4 | 4½ | 114 | 4 | 102 | 4 | 102 | 3⅞ | 98 | 3½ | 89 | 3½ | 89 |
| **Tube Diameter** (inches) (mm) | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 |
| **Eyepiece Diameter** (inches) (mm) | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 |
| **Front End Diameter** (inches) (mm) | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.550 | 39.4 | 1.725 | 43.8 | 1.875 | 47.6 | 2.020 | 51.3 |
| **Length** (inches) (mm) | 9⅜ | 238 | 10⅜ | 264 | 10⅝ | 270 | 11¾ | 299 | 13 7/16 | 341 | 15 | 381 | 15¾ | 400 |
| **Weight** (ounces) (grams) | 9¾ | 276 | 10¼ | 291 | 10¼ | 291 | 12 | 340 | 13½ | 383 | 15½ | 439 | 16¼ | 461 |
| **Graduated Adjustments** (change in inches at 100 yards, or minute of angle) | ½ | ½ | ½ | ½ | ½ | ½ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ |
| **Reticles** Available** | 1,2,3,5 | 1,2,3,5 | 1,2,3,5 | 1,2,3,5 | 1,2,3,5 | 1,2,3,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,4,5 | 1,2,4,5 | 1,2,4,5 | 1,2,4,5 |

***Weaver Scopes** offer carefully balanced magnification, field of view, eye relief, and diaphragming to provide hunters with maximum efficiency, safety, and clarity.

****RETICLES** **1** Crosshair **2** Dual X **3** Post and Crosshair **4** Range-Finder **5** Dot
Reticles available as indicated: 1, 2, 3, and 4 at no extra cost. 5 at extra cost.
**FOCUS** Eyepiece of all scopes adjusts to user's vision.

1. CROSSHAIR | 2. DUAL X® | 3. POST AND CROSSHAIR | 4. RANGE-FINDER® | 5. DOT (at extra cost)

## New Weaver® Steel-Lite II™ Models

# V Models

More and more hunters find that only a Weaver V Model offers all the flexibility and versatility they need—plus the sure year-after-year dependability of the sturdiest fixed-power scopes. An easy turn of the power change ring supplies the magnification that's just right for 'most any hunting situation.

Five V Models for 1979 include the new 3- to 9-power (without focusing objective) V9. All Weaver Variable models offer a continuous and smooth power change; improved sealing and fogproofing; the Micro-Trac Adjustment System for superaccuracy; and Steel-Lite II construction for a new dimension in lightness, toughness, and dependability.

Focus and point of impact are the same at all powers. Reticle remains constantly centered.

Precision optics are magnesium fluoride coated. Long eye relief is safe at all magnifications. Models V9F and V12F have Range-Focus. All five reticle styles are offered.

| K12F | V4.5 | V7 | V9 | V9F | V12F | Model |
|---|---|---|---|---|---|---|
| 11.6 | 1.6-4.3 | 2.5-6.7 | 3.3-8.8 | 3.3-8.8 | 4.4-11.8 | **Actual Magnification*** |
| 3.3 | 21-8 | 13.3-5 | 10.3-4 | 10.3-4 | 7.7-3 | **Field of View*** at 100 yds (ft) at 100 m (m) |
| 89 | 111-98 | 102-98 | 95-95 | 95-95 | 98-108 | **Eye Distance*** (inches) (mm) |
| 25.4 | 25.4 | 25.4 | 25.4 | 25.4 | 25.4 | **Tube Diameter** (inches) (mm) |
| 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | **Eyepiece Diameter** (inches) (mm) |
| 51.3 | 25.4 | 39.4 | 47.6 | 51.3 | 51.3 | **Front End Diameter** (inches) (mm) |
| 406 | 264 | 314 | 359 | 356 | 356 | **Length** (inches) (mm) |
| 468 | 383 | 410 | 496 | 496 | 496 | **Weight** (ounces) (grams) |
| ¼ | ½ | ¼ | ¼ | ¼ | ¼ | **Graduated Adjustments** (change in inches at 100 yards, or minute of angle) |
| 1,2,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | **Reticles** ** **Available** |

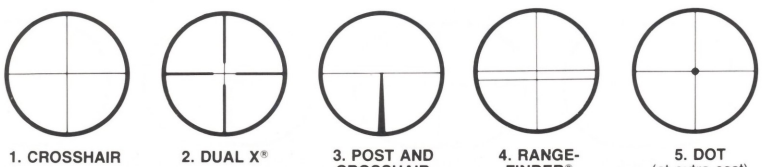

1. CROSSHAIR | 2. DUAL X® | 3. POST AND CROSSHAIR | 4. RANGE-FINDER® | 5. DOT (at extra cost)

***Weaver Scopes** offer carefully balanced magnification, field of view, eye relief, and diaphragming to provide hunters with maximum efficiency, safety, and clarity.

****RETICLES** **1** Crosshair **2** Dual X **3** Post and Crosshair **4** Range-Finder **5** Dot
Reticles available as indicated: 1, 2, 3, and 4 at no extra cost. 5 at extra cost.

**FOCUS** Eyepiece of all scopes adjusts to user's vision.

# KW&VW Models

## New Weaver® Steel-Lite II™ Models

Weaver Steel-Lite II scopes for 1979 now feature seven Wider-View models, including the all new V9W (without Range-Focus).

A rectangular shaped eyepiece gives a wider view than a standard scope of the same power—as much as 40% wider on the K3W. And there's no sacrifice in superior quality and outstanding performance.

Wider-View is designed by Weaver engineers to include all the proven features that have made K and V Models America's leading scopes: One-piece, machine-tooled steel tube. The patented Micro-Trac Adjustment System. Vacuumized, nitrogen-processed, and super-sealed for absolute fog-proofing. Bright, crisp, distortion-free optics. Long, safe eye relief. And the all new SL•II finish to match the receivers and barrels of the finest rifles.

Range focus now offered on the V9WF. All five reticle styles available (Range-finder not offered on the K3W).

| Model | K3W | | K4W | | K6W | | V4.5W | | V7W | | V9W | | V9WF | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Actual Magnification*** | 2.9 | 2.9 | 3.7 | 3.7 | 6 | 6 | 1.6-4.2 | 1.6-4.2 | 2.6-6.9 | 2.6-6.9 | 3.3-9 | 3.3-9 | 3.3-9 | 3.3-9 |
| **Field of View*** at 100 yds (ft) at 100 m (m) | 48 | 16 | 38 | 12.7 | 24 | 8 | 74-27 | 24-6.9 | 43-17 | 14.3-5.7 | 35-13 | 11.7-4.3 | 35-13 | 11.7- |
| **Eye Distance*** (inches) (mm) | 3½ | 89 | 3⅝ | 92 | 3½ | 89 | 4¼-3¾ | 108-95 | 3⅝-3¾ | 92-95 | 3⅝-3⅝ | 92-92 | 3⅝-3⅝ | 92-92 |
| **Tube Diameter** (inches) (mm) | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 |
| **Eyepiece Diameter** (inches) (mm) | 1.710 | 43.4 | 1.710 | 43.4 | 1.710 | 43.4 | 1.710 | 43.4 | 1.710 | 43.4 | 1.710 | 43.4 | 1.710 | 43.4 |
| | x1.425 | x36.2 | x1.425 | x36.2 | x1.425 | x36.2 | x1.425 | x36.2 | x1.425 | x36.2 | x1.425 | x36.2 | x1.425 | x36.2 |
| **Front End Diameter** (inches) (mm) | 1.000 | 25.4 | 1.550 | 39.4 | 1.725 | 43.8 | 1.000 | 25.4 | 1.550 | 39.4 | 1.875 | 47.6 | 2.020 | 51.3 |
| **Length** (inches) (mm) | 11 | 279 | $11^{13}/_{16}$ | 300 | 13¼ | 337 | 10⅜ | 264 | 12⅜ | 314 | 14⅛ | 359 | 14 | 356 |
| **Weight** (ounces) (grams) | 11 | 312 | 13 | 368 | 14½ | 410 | 14¼ | 404 | 15¼ | 432 | 18¼ | 517 | 18¼ | 517 |
| **Graduated Adjustments** (change in inches at 100 yards, or minute of angle) | ½ | ½ | ¼ | ¼ | ¼ | ¼ | ½ | ½ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ |
| **Reticles** Available** | 1,2,3,5 | 1,2,3,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 | 1,2,3,4,5 |

***Weaver Scopes** offer carefully balanced magnification, field of view, eye relief, and diaphragming to provide hunters with maximum efficiency, safety, and clarity.

****RETICLES** **1** Crosshair **2** Dual X **3** Post and Crosshair **4** Range-Finder **5** Dot
Reticles available as indicated: 1, 2, 3, and 4 at no extra cost. 5 at extra cost.
**FOCUS** Eyepiece of all scopes adjusts to user's vision.

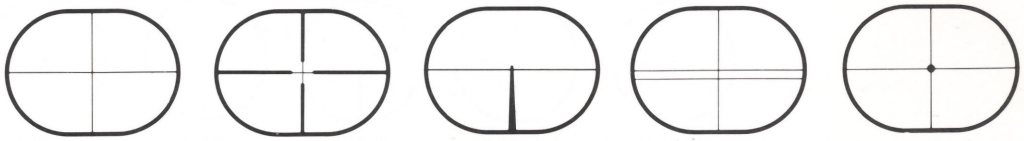

**1. CROSSHAIR** **2. DUAL X®** **3. POST AND CROSSHAIR** On VW Models, post does not extend above crosshair. **4. RANGE-FINDER®** **5. DOT** (at extra cost)

# T Models

You'll find a lot of T Model Weaver Scopes on the target and silhouette range, and you'll find a lot of satisfied Weaver customers that will swear by them. In their first two years on the market, the T's made their mark with exceptional performance at the NRA Silhouette Championship. In both 1977 and 1978, the national champion won with a Weaver T Model.

This year, two new T Models (T20 and T25) offer additional magnification for bench-rest target-shooting and long-range varmint hunting. That means a total of five great T Models scopes for 1979.

Thanks to Weaver's exclusive Micro-Trac Adjustment System, the shooter can count on superior repeatability and precise adjustment with virtually no wear on the mechanism. Micrometer adjustments on the focusing objective allow parallax-free settings to be established for varying distances, and the easy-to-read elevation adjustment lets the shooter go from 200 to 500 meters in a single rotation. T Models have enough windage and elevation capability to encompass virtually all shooting sports, and the zero-set feature allows the shooter to set each knob to zero as a reference point, once the sighting-in is completed.

More and more people are competing and winning with the T Models. For pinpoint accuracy and exceptional repeatability, plus the rugged durability you've come to expect from Weaver, the T Models are a winner by a longshot.

| Model | T6 | | T10 | | T16 | | T20 | | T25 | |
|---|---|---|---|---|---|---|---|---|---|---|
| **Actual Magnification*** | 6 | 6 | 10 | 10 | 16 | 16 | 20 | 20 | 25 | 25 |
| **Field of View*** at 100 yds (ft) at 100 m (m) | 19 | 6.3 | 11 | 3.7 | 7 | 2.3 | 4.8 | 1.6 | 4.2 | 1.4 |
| **Eye Distance*** (inches) (mm) | 3½ | 89 | 3½ | 89 | 3⅝ | 92 | 3¾ | 95 | 3¾ | 95 |
| **Tube Diameter** (inches) (mm) | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 | 1.000 | 25.4 |
| **Eyepiece Diameter** (inches) (mm) | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 | 1.485 | 37.7 |
| **Front End Diameter** (inches) (mm) | 2.020 | 51.3 | 2.020 | 51.3 | 2.020 | 51.3 | 2.020 | 51.3 | 2.020 | 51.3 |
| **Length** (inches) (mm) | 14¼ | 362 | 15 | 381 | 15¾ | 400 | 18½ | 470 | 19⅛ | 486 |
| **Weight** (ounces) (grams) | 17¾ | 503 | 18 | 510 | 18¾ | 532 | 20 | 568 | 20 | 568 |
| **Graduated Adjustments** (change in inches at 100 yards, or minute of angle) | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ | ¼ |
| **Reticles *Available** | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 | 1,2,5,6 |

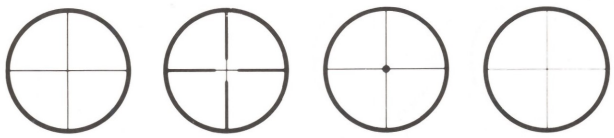

1. CROSSHAIR
2. DUAL X*
5. DOT (at extra cost)
6. FINE CROSSHAIR (at extra cost)

***Weaver Scopes** offer carefully balanced magnification, field of view, eye relief, and diaphragming to provide hunters with maximum efficiency, safety, and clarity.

****RETICLES** **1** Crosshair **2** Dual X **5** Dot **6** Fine Crosshair

Reticles available as indicated: 1 and 2 at no extra cost. 5 and 6 at extra cost.

**FOCUS** Eyepiece of all scopes adjusts to user's vision.

# 22 Models

Advanced D Models and V22 have outstanding features usually found only in more expensive scopes: large 7/8" tubes, matching turret of modern design, improved optics with larger eyepiece. Stronger than ever, they are made of finest materials by skilled American craftsmen.

Weaver's constantly-centered reticle permits unusual speed and ease of aim. Use is limited to light recoil rifles only because of relatively short eye relief.

Factory-equipped with Tip-Off or N Mount at no extra cost.

Crosshair reticle is standard in all three scopes; Dual X is optional in all three at extra cost.

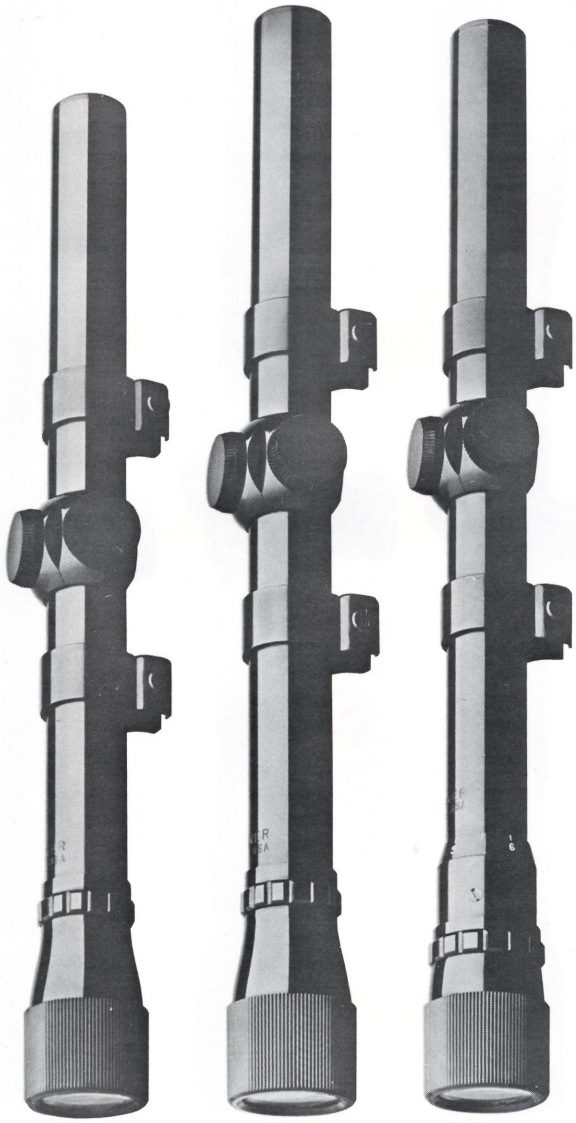

| Model | D4 | | D6 | | V22 | |
|---|---|---|---|---|---|---|
| **Actual Magnification*** | 4.2 | 4.2 | 6.2 | 6.2 | 3-5.8 | 3-5.8 |
| **Field of View*** at 100 yds (ft) at 100 m (m) | 29 | 9.7 | 20 | 6.7 | 31-16 | 10.3-5.3 |
| **Eye Distance*** (inches) (mm) | 2¼ | 57 | 2¼ | 57 | 1⅝-2¼ | 41-57 |
| **Tube Diameter** (inches) (mm) | .875 | 22.2 | .875 | 22.2 | .875 | 22.2 |
| **Eyepiece Diameter** (inches) (mm) | 1.310 | 33.3 | 1.310 | 33.3 | 1.310 | 33.3 |
| **Front End Diameter** (inches) (mm) | .875 | 22.2 | .875 | 22.2 | .875 | 22.2 |
| **Length** (inches) (mm) | 11⅞ | 302 | 12 5/16 | 313 | 12⅜ | 314 |
| **Weight** (ounces) (grams) | 6½ | 184 | 6¾ | 191 | 7¾ | 220 |
| **Graduated Adjustments** (change in inches at 100 yards, or minute of angle) | 1 | 1 | 1 | 1 | 1 | 1 |
| **Reticles ** Available** | 1,2 | 1,2 | 1,2 | 1,2 | 1,2 | 1,2 |

***Weaver-Scopes** offer carefully balanced magnification, field of view, eye relief, and diaphragming to provide hunters with maximum efficiency, safety, and clarity.

****RETICLES** **1** Crosshair **2** Dual X Reticles available as indicated: 1 at no extra cost. 2 at extra cost.

**FOCUS** Eyepiece of all scopes adjusts to user's vision.



1. CROSSHAIR 2. DUAL X®

# Weaver®'s 1100/870 Scope Mount System

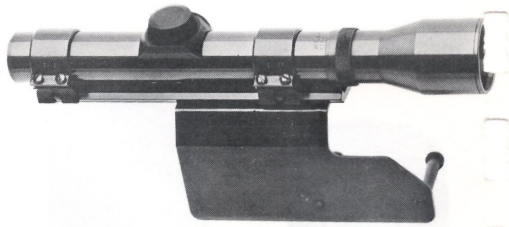

**Everything needed is conveniently pre-assembled with choice of K1.5 or K2.5 (with Dual X Reticle)**

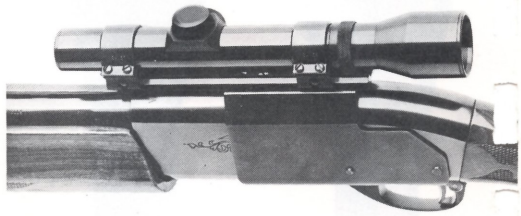

## System installs quickly on Remington 1100 and 870 shotguns ... with no drilling or tapping reguired

Mount a scope on Remington's 1100 or 870 shotgun with only a screwdriver. Two choices are available, pre-assembled with a Weaver K1.5 or K2.5. Just push the two existing trigger plate pins out, with the two bolts that come with the system. No drilling, no tapping of receiver.

The scope can be removed just as easily. Everything you need is conveniently pre-assembled and ready for immediate installation.

This system offers a great advantage where deer hunting with a shotgun is mandatory, or for anyone who enjoys turkey, goose, and other specialized shotgun hunting.

**Installation is simple: pins out, bolts in.**

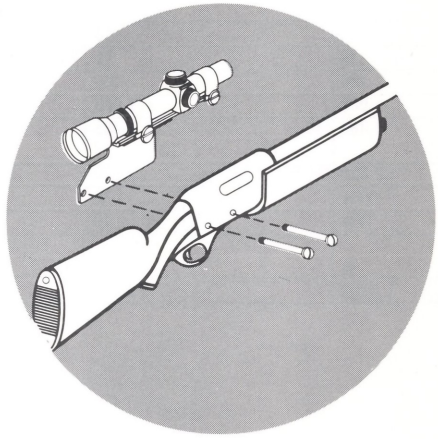

# Weaver® Lens Caps

Transparent windows allow the scope to be used quickly with the caps in position in emergency. Durable and snug fitting, Weaver Lens Caps provide attractive, inexpensive protection for the scope's optics. Made in thirteen sizes:

| | |
|---|---|
| 1.5 | K3W, V4.5W |
| K2.5, K3, V4.5 | K4W, V7W |
| K4, V7 | K6W |
| 5 | V9W |
| 10F, K12F | V9WF |
| K8, V9 | D4, D6, V22 |
| V9F, V12F | |

# Weaver® Parts Kit

A handy, comprehensive collection of useful, everyday replacement parts and screws for all Weaver Scopes and Weaver Mounts. Includes such often-needed items as turret caps and base screws. Complete set is arranged in a dozen compartments in an attractive, durable plastic box.

## S1
**for shotguns**

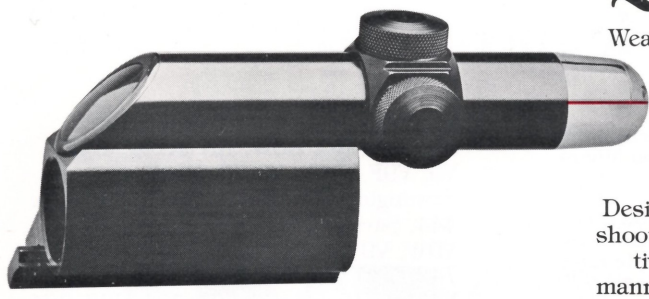

## S1100
**for Remington 1100 and 870 shotguns**

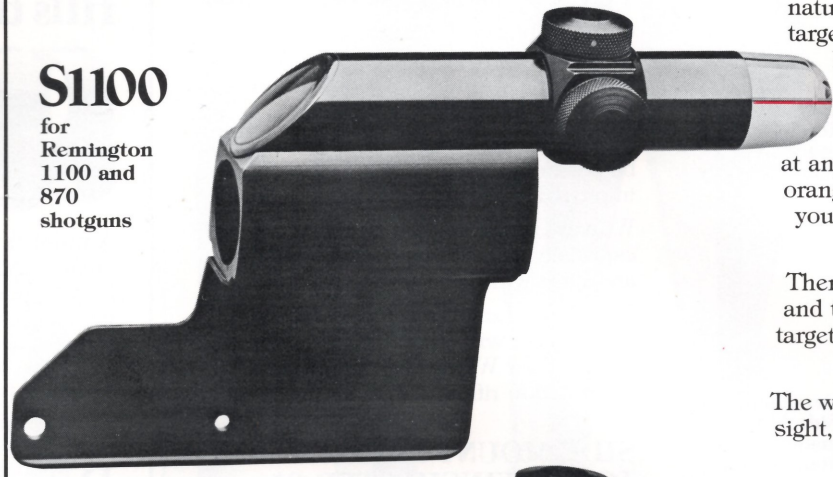

## R1
**for center-fire rifles**

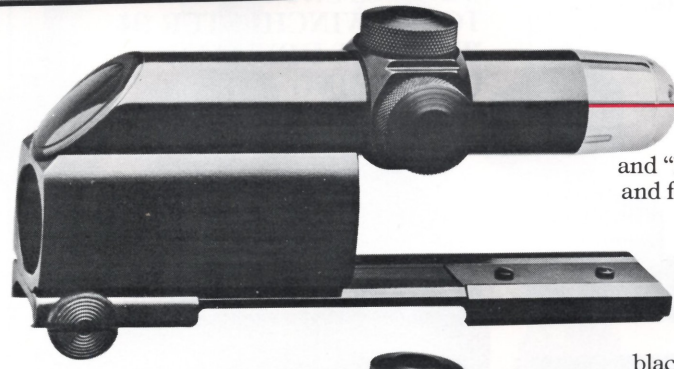

## R22
**for 22 rifles**

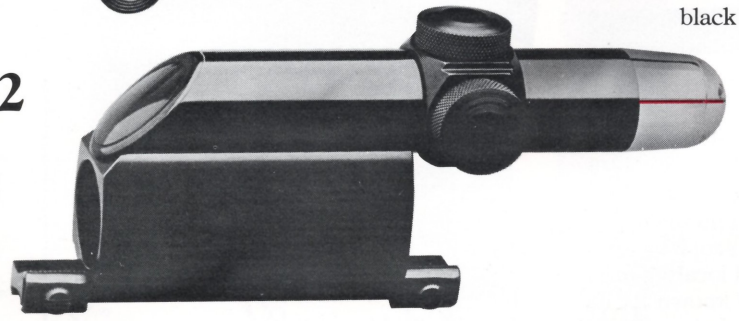

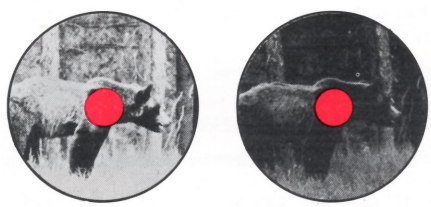

**Dot is bright blaze-orange, even in dim light or heavy cover.**

# Qwik-Point®

Weaver's amazing Qwik-Point is a completely different sighting concept. It can quickly improve natural shooting skills with a shotgun, center-fire rifle, or 22.

Designed for relatively short-range shooting, Qwik-Point is most effective when used in the following manner: Mount your gun in an easy natural motion, then look at your target with both eyes open. Don't look at your gun or Qwik-Point. Just look naturally at your target without straining, much as you would look at anything else. The bright blaze-orange dot appears out there with your target, not at the end of the barrel.

There's no lining up of eye, bead, and target. You simply look at the target, swing the blaze-orange dot to it, and fire.

The world's fastest short-range rifle sight, Qwik-Point is ideal for brush guns like Winchester 94 and Marlin 336.

On shotguns, Qwik-Point is an effective short-cut to becoming an accomplished wingshot. Makes "swing" and "lead" easy to see, understand, and follow. Helps the expert detect where and why he missed.

Qwik-Point is shockproof, weatherproof, foolproof. Made of lightweight aluminum with durable jet-black anodizing. Easily sighted in like a scope.

### Specifications:

**Weight:**
**S1** 7 3/4 ounces/220 grams
**S1100** 7 3/4 ounces/220 grams
**R1** 8 3/4 ounces/248 grams
**R22** 7 1/2 ounces/213 grams

**Length:**
**S1** 6 inches/152mm
**S1100** 6 inches/152mm
**R1** 6 1/4 inches/159mm
**R22** 6 3/4 inches/172mm

**Adjustments:**
1/4" click at 40 yards
**Eye Relief:** Infinite
**Focus:** Universal

### Mounting:

Model S1 for shotguns: Complete with mount and base (8A) for most pumps and automatics.
Model S1100 for Remington 1100 and 870 shotguns: Complete with side mount and bolts; installed in minutes without special tools.
Model R1 for center-fire rifles: Built-in mount attaches to Weaver top Mount bases (bases extra). Special bases (77, 78) available for Model 94 Winchester.
Model R22 for 22's: Complete with mount which fits factory-grooved receivers.

# Weaver® Detachable Mounts

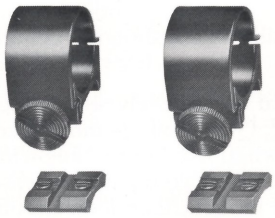

**Detachable Top Mount made in 7/8", 1", and 1.023" (26mm) diameters; High Style made in 1" diameter only**

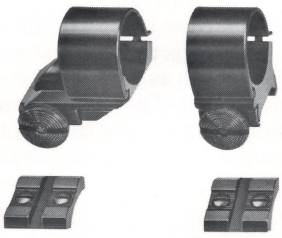

**Extension Top Mount made in 1" diameter only**

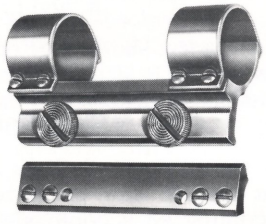

**Detachable Side Mount made in 1" diameter only**

**Detachable Long Side Mount in 1" diameter for Winchester 94 and other short-action rifles**

Detachable Top Mounts have been the standard of the industry for over 40 years.

They are the only quick detachable top mounts made in the U.S., and they allow precision in returning the scope to the rifle. The Weaver-designed locating and holding principle is widely known for its accuracy. This is particularly important for the shooter who uses his scope on more than one gun.

Light, compact, and finely finished, Weaver-Detachable Mounts can be used with complete assurance on rifles of heaviest recoil and under roughest hunting use. Installation is easy since most rifle receivers are factory drilled and tapped specifically for Weaver-Mounts.

High Style Top Mounts, made in 1" diameter only, are designed to provide adequate barrel and iron sight clearance for most scopes having objective diameters greater than 1 3/4". Scopes of this size (1 3/4") can be mounted on some rifles using regular Top Mounts.

Use High Style Top Mounts when installing K6, K6W, K8, K10F, K12F, V9, V9F, V9W, V9WF, V12F on Remington 600, 660, 788, Marlin 336, 444, Savage 99; K6, K6W, V9, V9F, V9W, V9WF, V12F on Remington 740, 742, 760; V9, V9F, V9W, V9WF, and V12F on Remington 700, 721, 722, 725.

On some bolt-action rifles, it is necessary to use High Style Top Mounts when installing KW and VW Models to prevent bolt interference.

Extension Top Mounts allow the scope to be positioned 3/4" further forward for improved eye relief.

Weaver-Detachable Side Mounts are especially suitable for shorter scopes, and are made with split rings in 1" diameter.

Detachable Long Side Mounts are made in 1" diameter with split rings, and are designed for Winchester 94 and other short-action rifles.

## SIDE MOUNT BASE 3B TO FIT WINCHESTER 94 WITHOUT DRILLING OR TAPPING

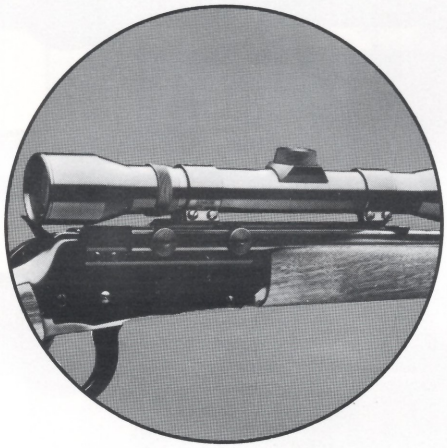

A new way to scope the Winchester 94 quickly, easily, and inexpensively.

Weaver's 3B Mount Base means no more expensive, custom gunsmithing. The 3B is designed to fit the top three screw holes that already exist in a Winchester 94. Using just a screwdriver, the job is done in minutes.

## NEW SIDE MOUNT BASE 3C

fits the Winchester 94 Caliber 375 "Big Bore" without drilling or tapping.

new for '79

## Medium Top Mount fills the gap.



A number of shooters have asked for a Weaver Detachable Top Mount that will provide adequate clearance for big-objective or wide-view scopes—without going all the way to the High Top Mount. The new Medium Top Mount is the answer—and the solution to many scope-mounting problems.

## Detachable Side Mount (High) for those large scopes

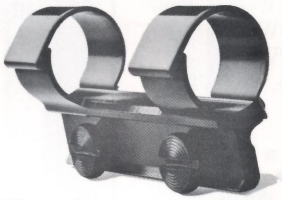

Now it's easy to mount scopes with large objective diameters on guns that require a side mount. New Detachable Side Mount (High) is now available in 1" diameter.

## ...and Detachable Long Side Mount (High)

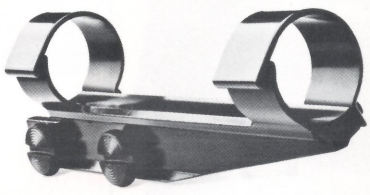

Designed for Winchester 94 and other short-action rifles, the Detachable Long Side Mount is now offered in a High Style to mount 1" scopes with objective diameter larger than 1 3/4".

# Weaver® Pivot Mounts

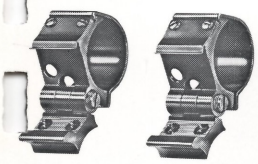

**Pivot Mount open**

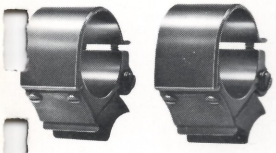

**Pivot Mount closed**

Weaver-Pivot Mounts permit choice of scope or iron sights. Top mounting gives wide spacing of mount rings, rigidity, low scope position, easy installation and removal. Replacement is accurate, alignment exact and fully dependable. Made for 1" scopes.

High Style Pivot Mounts are available in 1" diameter only. The high rings position the scope 1/4" higher than the standard ring, and provide adequate barrel and iron sight clearance for scopes with objective diameters greater than 1 3/4". Use High Style Pivot Mounts when installing K6, K6W, K8, K10F, K12F, V9, V9F, V9W, V9WF, and V12F scopes on these rifles: Remington 700, 742, 760, 600, 660; Marlin 336, 444; and Savage 99.

On some bolt-action rifles, it is necessary to use High Style Pivot Mounts when installing KW and VW Models to prevent bolt interference.

## Mount Base Assortments

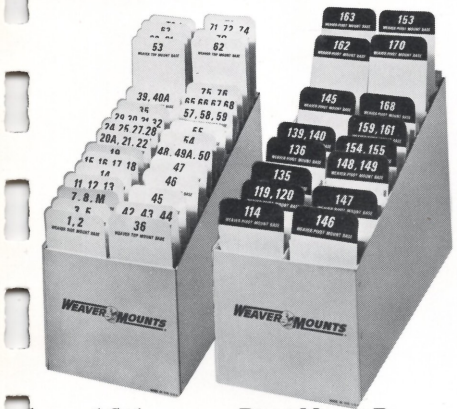


**Top and Side Mount Base Assortment #1**

**Pivot Mount Base Assortment #2**

Comprehensive assortments of Weaver's fastest-selling mount bases are packaged in handy zip-top plastic bags that are easy to open, easy to reseal. Each assortment is shipped complete with a colorful metal display case and dividers, ready to set up and sell.

Top and Side Mount Base Assortment #1 consists of 99 carefully-selected bases, plus display case and dividers.

Pivot Mount Base Assortment #2 offers a well-balanced selection of 77 most-used bases, plus display case and dividers.

# Weaver® Tip-Off Mounts

**Weaver 1" Tip-Off Mount for K Models and other 1" scopes**

**Weaver 7/8" Tip-Off Mount for D Models, V22, and other 7/8" scopes**

Tip-Off Mounts are made for use on 22 rifles with 3/8" dovetail receiver grooves. No bases required. They clamp into the rifle receiver grooves. No tools needed. Clamping screws tighten easily with a coin.

1" Tip-Off Mounts, a pair of split rings, are designed to mount K Models and other 1" scopes.

7/8" Tip-Off Mounts, a pair of solid rings, are designed to mount Weaver D Models, V22, and other 7/8" scopes. Also available in 3/4" rings to fit 3/4" scopes.

**These rifles have 3/8" receiver grooves:**
Anschutz Mark 10, 141, 153, 520, 1363, 1388, 1416, 1418, 1441, 1442, 1443, 1516, 1518
Browning T-Bolt, BL-22
CIL 68, 121, 125, 167, 180, 190S, 212, 227, 300, 310, 470
Colt Colteer, Courier, Stagecoach Carbine
Cooey 64, 121, 131, 141, 250, 255, 270, 275, 290
Glenfield 10, 20, 60, 70, 75
H&R 422, 750, 751, 755, 760, 800, 865, 866
High Standard 22 Sport-King
Ithaca X5 Lightning, 72, Tikka
Kleinguenther K11, K12, K13
Kodiak 260
Lee-Enfield requires adapter T0-1 at extra cost; must be drilled, tapped
Marlin 49, 56, 57, 80, 81, 88, 89, 98, 99, 101, 122, 780, 781, 782, 783, 980, 989
Montgomery Ward 822, 832, 868, 892
Mossberg 142, 144, 146, 151, 152, 300 Series, 400, 402, 430, 432, 620, 640
Noble 235, 275, 285, 835, 875, 885
Remington 10. 11, 12, 66, 76, 77, 510, 511, 512, 513S, 521T, 540X, 541S, 550, 552, 572, 580, 581, 582, 590M, 591M, 592M
Ruger 10/22 with T0-9 base
Savage 4, 5, 6, 24, 29, 54, 60, 63, 65, 88, 90, 164, 184, 219
Stevens 34, 46, 73, 84, 85, 86, 87
Weatherby XXII
Winchester 61, 69, 72, 74, 75S, 77, 121, 131, 135, 141, 145, 150, 190, 250, 255, 270, 275, 290, 310, 320, 325, 490, 9422

**These air rifles and pellet guns have 3/8" receiver grooves:**
Anschutz 330, 333
BSA Meteor Airsporter
Crosman 125, 500, 622, 761XL
Daisy 225, 230, 250, 300, 770, 880, 881, 1880, 3300
Franchi Auto Centennial, Deluxe
Pic Bobcat
Smith & Wesson 77A, 80
Winchester 425, 427, 435, 450

## Weaver® N Mounts

Type N Mounts (side bracket design) are pressed from tough alloy steel. They are rigid, sturdy, and suitable for use on high-power rifles and 22's. Made in 7/8" diameter for D Models and V22.

The dependability of the inexpensive N Mount has been proved under all conditions and on large caliber rifles.

# Weaver® See-Thru Mounts



**See-Thru Top Mount in 1" diameter for most center-fire rifles.**



**7/8" See-Thru Tip-Off Mount for the 22 market.**

## NOW WEAVER MAKES SEE-THRU MOUNTS IN BOTH 1" AND 7/8" DIAMETERS.

Two See-Thru Mounts now are available with the addition of the 7/8" size that fits almost any 22 rifle — thus opening a growing market to this recent development of double-purpose mounts.

Introduction of the first See-Thru Mount in 1975 eliminated the need for stocking different models or sizes for every center-fire rifle mounted, because it fit all Weaver Top Mount bases with square-cut, cross-bolt slots. Similarly, there is only one 7/8" See-Thru Mount that fits all 22's with grooved receivers.

Shooters of both types of rifles will appreciate the instant use of either scope or iron sights. There's nothing to take off, nothing to fiddle with. For quick, off-hand shots where a scope gives too much magnification, iron sights are immediately available.

In addition, the 1" See-Thru Mount can be removed instantly with a quick, twisting motion. Replacement is just as easy, with zero alignment. It can be used with complete confidence on rifles of heaviest recoil, and under the roughest hunting conditions.

Both See-Thru Mounts are light, compact, and finely finished, as are all Weaver-Mounts. Made with split rings, they can easily be attached without removing the eyepiece, turret, or any scope part.

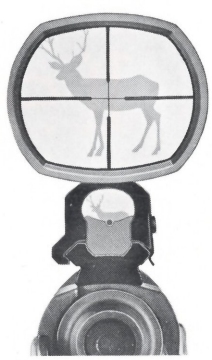

**Either Weaver See-Thru Mount allows instant choice; scope for long-range sighting, iron sights for close-in shots.**

# Weaver® Mounts and Bases

| Make, Model of Rifle | Bases for Detachable Mounts: Top Mount Rear | Bases for Detachable Mounts: Top Mount Front | Bases for Detachable Mounts: Side Mount | Bases for Pivot Mounts: Rear | Bases for Pivot Mounts: Front | N Mounts Made for ⅞" dia. Scopes |
|---|---|---|---|---|---|---|
| **ANSCHUTZ** 153 Deluxe, 1530, 1532, 1534 | 19 | 19 | .... | 119 | 119 | .... |
| 1568 | 61 | 46 | 1 | 161 | 146 | .... |
| **BROWNING** 22 Auto (base attaches to bbl. extending over receiver) | 60 | | .... | ..... | ..... | .... |
| 243, 308, 22-250, 222, and 222 Magnum (all in Sako actions) | 72 | 71 | .... | ..... | ..... | .... |
| Bolt Action, High-Power, other calibers | 45 | 46 | 5 | 145 | 146 | .... |
| Semi-Automatic, High-Power | 54 | 54 | .... | 154 | 154 | .... |
| BLR | 25 | 25 | .... | ..... | ..... | .... |
| **BSA** Monarch Medium Action 222, 243, 308 | 36 | 40A | .... | 136 | 140 | .... |
| Monarch Long Action 7mm, 270, 30-06 | 36 | 35 | .... | 136 | 135 | .... |
| Other high-powers | 28 | 28 | .... | ..... | ..... | .... |
| **CIL** 830 | .... | .... | 1 | ..... | ..... | .... |
| 871 | 62 | | .... | 162 | | .... |
| 900 | 19 | 19 | .... | 119 | 119 | .... |
| 950, 950C | 61 | 46 | 1 | 161 | 146 | .... |
| 972-C | 45 | 46 | .... | 145 | 146 | .... |
| **COLT** Coltsman in 223, 243, 308 calibers (round receivers) | 25 | 25 | .... | ..... | ..... | .... |
| Coltsman in 264, 30-06 calibers (round receivers) | 54 | 54 | .... | ..... | ..... | .... |
| Coltsman in 223 (Sako action) | 67 | 66 | .... | ..... | ..... | .... |
| Coltsman other cal. (Sako action) | 67 | 65 | .... | ..... | ..... | .... |
| Sauer | 35 | 35 | .... | 135 | 135 | .... |
| 57 | 45 | 46 | .... | 145 | 146 | .... |
| **COOEY** 60, 600 | .... | .... | 2 | ..... | ..... | N3 |
| 71 | 47 | 46 | 1 | 147 | 146 | .... |
| **ENFIELD** receiver cut down like: Remington 30 | 11 | 11 | 1 | ..... | ..... | .... |
| Winchester 70† | 47 | 46 | .... | 147 | 146 | .... |
| Remington 721† | 36 | 35 | .... | 136 | 135 | .... |
| **GARCIA** 73 | 53 | | .... | 153 | | .... |
| 74 | 67 | 66 | .... | ..... | ..... | .... |
| **H&R** 300, 301, 330, 370 prior to 1973 | 45 | 46 | 5 | 145 | 146 | .... |
| 300, 301 short action for 1973 and after (22-250, 243, 308) | 83 | 84 | .... | ..... | ..... | .... |
| 300, 301 long action for 1973 and after (270, 30-06, 7mm, 300 Win) | 54 | 46 | .... | 154 | 146 | .... |
| 360, 361 | 81 | | .... | ..... | ..... | .... |
| 317, 322 | 11 | 35 | .... | ..... | ..... | .... |
| 317 prior to 1975 model | 67 | 66 | .... | ..... | ..... | .... |
| Topper 30, 22 Jet, 158 prior to 1973 | 60 | | .... | ..... | ..... | .... |
| Topper 158C for 1973 and after | 82 | | .... | ..... | ..... | .... |
| 65, 165, 150, 151 (Auto) | 18 | 18 | 2 | ..... | ..... | N3 |
| 264, 265, 365, 250, 251, 450, 550 | 18 | 16 | 2 | ..... | ..... | N3 |
| 700 | 87 | | .... | ..... | ..... | .... |
| **HERTERS** U9 BSA Action (requires drilling, tapping) | 28 | 28 | .... | ..... | ..... | .... |
| U9 round receiver | 36 | 35 | .... | 136 | 135 | .... |
| J9 | 45 | 46 | 5 | 145 | 146 | .... |
| **HIGH STANDARD** Hi-Power | 55 | 46 | 1 | ..... | ..... | .... |
| **ITHACA** LSA-55, LSA-65 | 61 | 61 | .... | ..... | ..... | .... |
| **JAPANESE** 6.5 mm*†, 7.7mm*† | 70 | | 1 | 170 | | .... |
| **KRAG** (offset left for easy ejection) | .... | .... | 2 | ..... | ..... | .... |
| **LEE-ENFIELD** (Use TO-1 Adapter Base and Tip-Off Mount) | .... | .... | .... | ..... | ..... | .... |
| **MARLIN** 36, 336, 62, 93, 444, 1893, 1895, Glenfield 30, Zane Grey | 63B | | .... | 163A | | .... |
| 1894 | 63B | | .... | ..... | ..... | .... |
| 455 | 45 | 46 | 5 | ..... | ..... | .... |
| 57 Magnum | 58 | | .... | ..... | ..... | .... |
| **MAUSER FN** including former Husqvarna (with receiver ring about 1.410" diameter)*; 95, 98 | 45 | 46 | 5 | 145 | 146 | .... |
| Mark X | 55 | 20A | .... | ..... | ..... | .... |
| HVA Lightweight Husqvarna (with receiver ring about 1.300" dia.)* | 55 | 46 | 1 | 155 | 146 | .... |
| ZB 8mm*, 7mm*, 6.5mm*, with round receivers | 55 | 46 | 1 | 155 | 146 | .... |
| Bauer 3000, 4000 | 68 | 46 | .... | 168 | 146 | .... |
| **MOSSBERG** 800 | 55 | 55 | .... | 155 | 155 | .... |
| 810 | 25 | 11 | .... | ..... | ..... | .... |
| 25, 26, 42, 46M, 140, 142, 146, Also Late 45, 46 with ¾" dia. bbls. | 12 | 13 | 2 | ..... | ..... | N3 |
| 43, 44, 144, 46BT, 35. Also early Models 45, 46, 46A, 46B with 13/16" dia. bbls. | 12 | 16 | 2 | ..... | ..... | N3 |
| 40 | 16 | 21 | 2 | ..... | ..... | N3 |
| 400 | 20A | 42 | .... | ..... | ..... | .... |
| 472 | 80 | | .... | ..... | ..... | .... |
| 500AS shotgun | 88 | | .... | ..... | ..... | .... |
| **MUSGRAVE** Mark I, Mark II | 54 | 46 | .... | 154 | 146 | .... |
| Mark III, Mark IV | 45 | 46 | .... | 145 | 146 | .... |
| **PARKER-HALE** 1000, 1000C, 1100, 1200, 1700 | 45 | 46 | .... | 145 | 146 | .... |
| **REMINGTON** 700 Long Action in 270, 280, 25-06, 30-06, 7 mm Mag., 300 Win. Mag., 264, 375, 458, 40X-L; 721; 725 in 270, 280, 30-06, 375 | 36 | 35 | 1 | 136 | 135 | .... |
| 700 Short Action in 17, 222, 222 Mag., 22-250, 243, 6mm, 308; 722, 40X-S; 725 in 222, 243, 244 | 36 | 40A | 1 | 136 | 140 | .... |
| 740, 742, 760 | 62 | | .... | 162 | | .... |
| 660, 600 | 70 | | 1 | 170 | | .... |
| 788, long action 222, 22/250, 30/30 | 76 | 75 | .... | ..... | ..... | .... |
| 788 extra long 243, 6mm, 308 | 76 | 75 | .... | ..... | ..... | .... |
| 30 | 11 | 11 | 1 | ..... | ..... | .... |
| 14, 141 | 20A | 27 | .... | ..... | ..... | .... |
| 12A, 121 with ¾" dia. bbls. | 18 | 13 | 2 | ..... | ..... | .... |
| 121 with 13/16" diameter barrels | 18 | 17 | 2 | ..... | ..... | .... |
| 12C octagon barrel | 18 | 31 | .... | ..... | ..... | N5 |
| 24, 241 (#60 1-pc. base attaches to bbl. and extends back over receiver; for 1" scopes only) | 60 | | .... | ..... | ..... | N5 |
| 25 | 18 | 21 | 2 | ..... | ..... | N5 |
| 10, 11, 12, 521T, 34*, 341* | 43 | 42 | 2 | ..... | ..... | N3 |
| 513S, 513T | 43 | 44 | 2 | ..... | ..... | N3 |
| 514 | 16 | 21 | 2 | ..... | ..... | N3 |

| Make, Model of Rifle | Bases for Detachable Mounts: Top Mount Rear | Bases for Detachable Mounts: Top Mount Front | Bases for Detachable Mounts: Side Mount | Bases for Pivot Mounts: Rear | Bases for Pivot Mounts: Front | N Mounts Made for ⅞" dia. Scopes |
|---|---|---|---|---|---|---|
| **REMINGTON (continued)** 541S | 15 | 15 | .... | ..... | ..... | .... |
| 33* | 17 | 13 | 2 | ..... | ..... | N3 |
| 41* | 17 | 17 | 2 | ..... | ..... | N3 |
| XP-100 | 70 | | .... | ..... | ..... | .... |
| **RUGER** 44 Magnum Deerstalker | 47 | 68 | .... | 147 | 168 | .... |
| 10/22 | TO-9 | | .... | ..... | ..... | .... |
| 77ST round top | 79 | 35 | .... | ..... | ..... | .... |
| 3 | 85 | 86 | .... | ..... | ..... | .... |
| Mini-14 | .... | .... | 9 | ..... | ..... | .... |
| **SAKO** Vixen (requires no drilling) | 67 | 66 | .... | ..... | ..... | .... |
| Forester, Finnbear (no drilling) | 67 | 65 | .... | ..... | ..... | .... |
| Finnwolf | 53 | | .... | 153 | | .... |
| **SAVAGE** 99, 1895 | 14 | 19 | .... | 114 | 119 | .... |
| 110 short action RH** | 61 | 46 | 1 | 161 | 146 | .... |
| 110, 111, 112 long action RH** | 61 | 46 | 1 | 161 | 146 | .... |
| 54 Anschutz, 1422, 1424 | 15 | 15 | .... | ..... | ..... | .... |
| 24V | 74 | | .... | ..... | ..... | .... |
| 20*, 340, 342 | .... | .... | 1 | ..... | ..... | .... |
| 40, 45 | 11 | 11 | 2 | ..... | ..... | .... |
| 3 | 16 | 21 | 2 | ..... | ..... | N3 |
| 7 | 12 | 12 | 2 | ..... | ..... | N3 |
| 19, 23 | 15 | 16 | 2 | ..... | ..... | N3 |
| 219 | 12 | 30 | 2 | ..... | ..... | N3 |
| 25 octagon barrel | 19 | 31 | .... | ..... | ..... | N5 |
| 170 | 62 | | .... | 162 | | .... |
| 2400 | 67 | 66 | .... | ..... | ..... | .... |
| **SCHULTZ & LARSEN** | 54 | 46 | 1 | 154 | 146 | .... |
| **SEARS** 50, 51 | 45 | 46 | 5 | 145 | 146 | .... |
| 51L | 55 | 46 | 1 | 155 | 146 | .... |
| 53 | 47 | 46 | 1 | 147 | 146 | .... |
| 54, 100 | .... | .... | 3B | ..... | ..... | .... |
| **SHILEN DGA** | 61 | 61 | .... | ..... | ..... | .... |
| **SMITH & WESSON** Mauser actions with small receiver ring | 55 | 46 | 1 | 155 | 146 | .... |
| **SPRINGFIELD** '03*† | 54 | 55 | 1 | 154 | 155 | .... |
| '03-A3*† | 59 | 45 | .... | 159 | 145 | .... |
| **STEVENS** 26 | 22 | 22 | 2 | ..... | ..... | N3 |
| 27 octagon | 31 | 31 | .... | ..... | ..... | N5 |
| 53 | 16 | 21 | 2 | ..... | ..... | .... |
| 56, 66 | 12 | 13 | 2 | ..... | ..... | N3 |
| 57, 76, 417½, 762 | 12 | 12 | 2 | ..... | ..... | N3 |
| 416 | 18 | 17 | 2 | ..... | ..... | N3 |
| 417 | 15 | 15 | 2 | ..... | ..... | N3 |
| 418, 418½ | 16 | 16 | 2 | ..... | ..... | N3 |
| 325, 322 | .... | .... | 1 | ..... | ..... | .... |
| **STEVENS-SPRINGFIELD** 83 | 16 | 21 | 2 | ..... | ..... | .... |
| 872 | 12 | 12 | 2 | ..... | ..... | N3 |
| 840 | .... | .... | 1 | ..... | ..... | .... |
| **U.S. CARBINE** Cal. 30 M1 | .... | .... | M | ..... | ..... | .... |
| **VOERE** 2150, 2165/1, 2165/2, 2165/3, 2165/4 | 45 | 46 | .... | 145 | 146 | .... |
| 2130 (must be drilled, tapped) | 28 | 28 | .... | ..... | ..... | .... |
| **WEATHERBY** Mark V, Vanguard | 36 | 35 | .... | 136 | 135 | .... |
| Mark V 22-250, 224 | 36 | 46 | .... | 136 | 146 | .... |
| Models with FN Mauser actions | 45 | 46 | 5 | 145 | 146 | .... |
| **WESTERNFIELD** 730 | 25 | 11 | .... | ..... | ..... | .... |
| 740 | 63B | | .... | 163A | | .... |
| 750 | 67 | 65 | .... | ..... | ..... | .... |
| 770 | 55 | 20A | .... | ..... | ..... | .... |
| 772 | 80 | | .... | ..... | ..... | .... |
| 775, 780 | 55 | 55 | .... | 155 | 155 | .... |
| **WINCHESTER** 70, 70A, 70 Varmint | 47 | 46 | 1 | 147 | 146 | .... |
| Pre-1964 70, 54* | 48 | 46 | 1 | 148 | 146 | .... |
| 70 Target, 300 H&H, 375 H&H | 49A | 46 | 1 | 149 | 146 | .... |
| 70, 375 H&H after 1963 | 49A | 46 | 1 | 139 | 146 | .... |
| 54*, early Model 70 | 48 | 46 | 1 | 148 | 146 | .... |
| 670, 770 | 47 | 46 | 1 | 147 | 146 | .... |
| 88, 100 | 53 | | .... | 153 | | .... |
| 94 | .... | .... | 3B | ..... | ..... | .... |
| 53, 55, 64, 65, 66, 71, 86, 92, 95 | .... | .... | 3A | ..... | ..... | .... |
| 07, 05, 10 | 20A | 17 | .... | ..... | ..... | .... |
| 43 | 18 | 18 | .... | ..... | ..... | .... |
| 03, 63 | 19 | 22 | 2 | ..... | ..... | .... |
| 06, 62, 62A, 90 octagon barrel | 32 | 32 | .... | ..... | ..... | N5 |
| 61 round barrel | 19 | 13 | 2 | ..... | ..... | .... |
| 61 octagon barrel | 25 | 32 | .... | ..... | ..... | N5 |
| 60*, 67*, 68* | 21 | 21 | .... | ..... | ..... | N3 |
| 57, 69 | 12 | 13 | 2 | ..... | ..... | N3 |
| 69A, 72, 47 | 12 | 17 | 2 | ..... | ..... | N3 |
| 74 | 12 | 12 | 2 | ..... | ..... | N3 |
| 77 | 15 | 32 | 2 | ..... | ..... | .... |
| 75 Sporter | 15 | 30 | 2 | ..... | ..... | N3 |
| 75 Target | 15 | 16 | 2 | ..... | ..... | N3 |
| 52* | 25 | 57 | 2 | ..... | ..... | N3 |
| 9422 | TO-10 | | .... | ..... | ..... | .... |
| **ZB** 22 | 28 | 24 | 2 | ..... | ..... | N3 |
| Hornet, 218 Bee | 39 | 24 | .... | ..... | ..... | .... |
| **SHOTGUNS** Pump shotguns except Winchester 42 | .... | .... | 8 | ..... | ..... | .... |
| Winchester 42 | .... | .... | 2 | ..... | ..... | .... |
| Auto shotguns EXCEPT Remington 11-48, 1100, Sportsman 48, 58, Winchester 50, Browning Double Auto, High Standard Auto | .... | .... | 7 | ..... | ..... | .... |
| Remington Auto 11-48, 1100, Sportsman 48, 58, Winchester 50, High Standard Auto | .... | .... | 8 | ..... | ..... | .... |

NOTE: Top Mounts with No. 50 (long, one-piece) base can be used on double and single barrel shotguns with ribs thick enough for base screws.

**QWIK-POINT:** Installation information packed with product.

*Rifles so marked (and older guns in some other models) require bolt handle alteration.

**Due to wide-ring spacing, V7, V7W, V9, V9F, V9W, V9WF, and V12F Models cannot be installed on Savage 110, 111, and 112 with Pivot Mount rings.

†Enfield, Japanese, and Springfield: Pivot Mount usable only on sporterized guns with suitable fron and middle sights.

D4, D6, and V22 Scopes (like other makes designed for 22 rifles) have short eye relief, and for this reason should not be used on high power rifles.